

13th Joint Workshop on Electron Cyclotron Emission and Electron Cyclotron
Resonance Heating

Nizhny Novgorod, Russia May 17-20, 2004



РАН

Low Frequency Gyrotrons for Fusion



**ИИП
“ГИКОМ”**

**V.E. Zapevalov, Yu.K. Kalynov, V.K. Lygin,
O.V. Malygin, S.A. Malygin, M.A. Moiseev,
V.N. Manuilov, V.I. Khizhnjak, E.A. Solujanova, E.M. Tai**

(IAP RAS, GYCOM Ltd., Nizhny Novgorod)

Outline

- • Introduction
- • Design Features
- • Cavity modes
- • Electron gun
- • Quasi-optical mode converter
- • Experiments
- Conclusion


Introduction

- For some experimental plasma set-ups powerful RF sources with frequency from 5 GHz up to 30 GHz are requested.
- The report presents the results of the low frequency powerful gyrotrons development in Russia. Test results for 5GHz/0.5 MW and 28GHz/0.5MW gyrotrons are presented.
- Several design versions of 5 GHz, 17.5 GHz and 28 GHz gyrotrons with output power 0.5-1 MW, its specific property details, special technical problems and test set-up are discussed.

DIFFERENCE of mm and cm Gyrotrons

	Problem	mm	cm
1	mode selection	+	-
2	cavity heat loading	+	-
3	electron beam	+ initial velocity spread	+ Non adiabatic effects
4	mode converter	+	++
5	collector	+	++
6	window	+	-

5GHz/500kW/1s Gyrotron

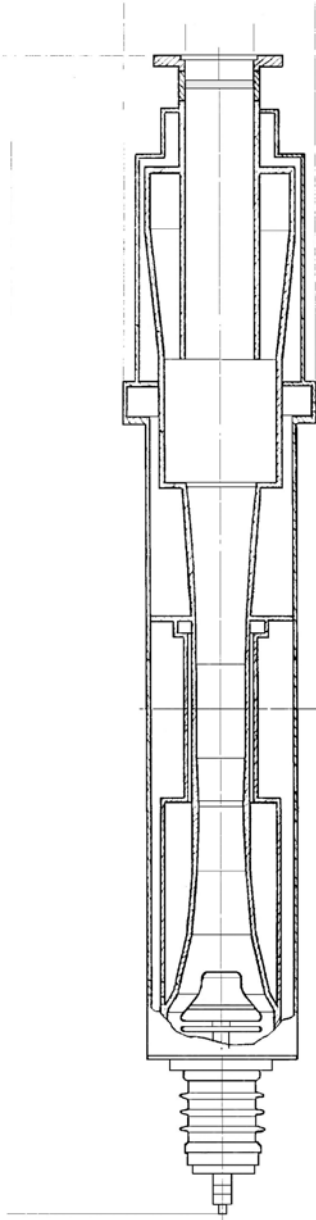

- Operating mode **TE_{0,1}**
- Wavelength **60 mm**
- Electron energy **70 keV**
- Beam current **25 A**
- Pulse duration **1 s**
- Efficiency **30 %**
- Output power **500 kW**


5GHz/500kW/1s Gyrotron

DIODE-TYPE MAGNETRON INJECTION GUN

Beam voltage	70 kV
Operating beam current	25 A
Cathode radius	45 mm
Beam radius at cavity	25.6 mm
Emitter current density	2 A/cm²
Pitch-factor	1.3


5GHz/500kW/1s Gyrotron

DIODE-TYPE MAGNETRON INJECTION GUN

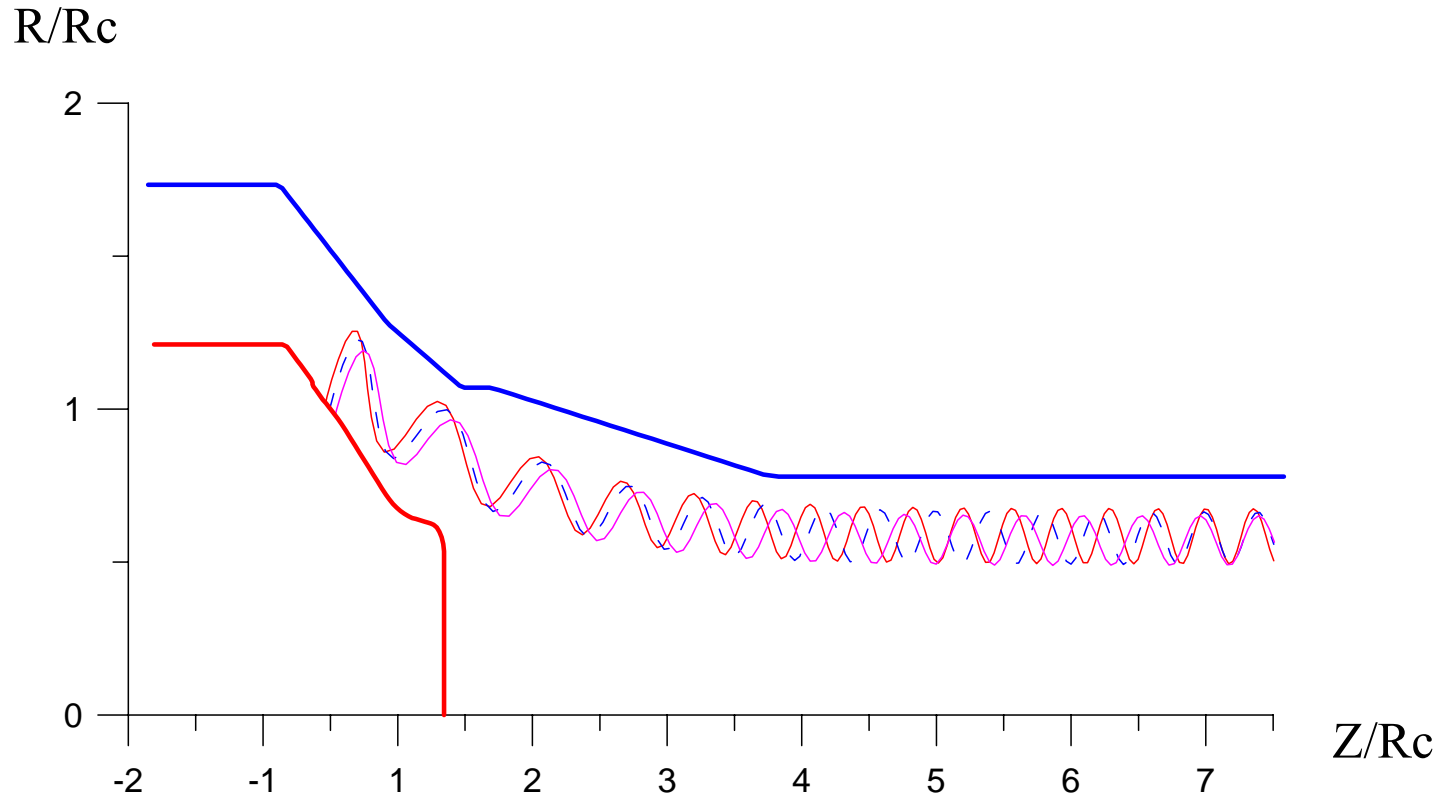


5GHz/500kW/1s Gyrotron

The velocity spread and average oscillatory energy vs.
beam parameters

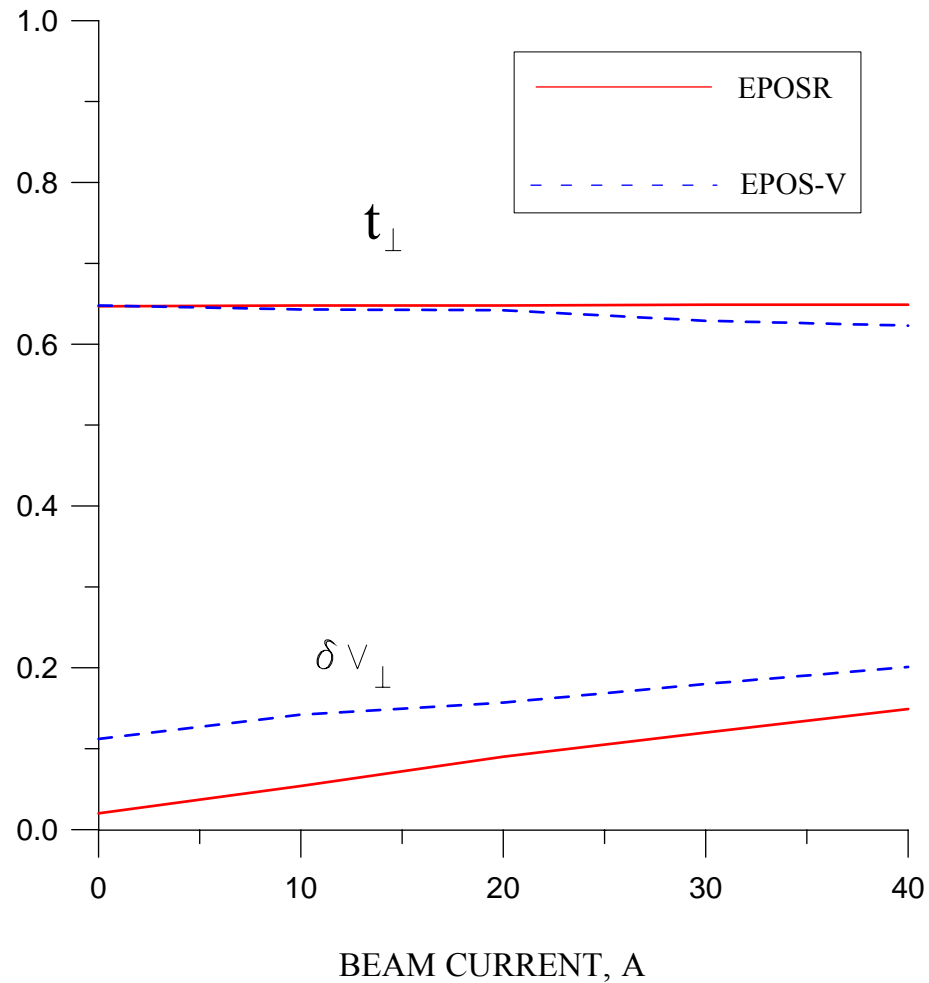


5GHz/500kW/1s Gyrotron

Profile of the cavity and distribution of an electromagnetic field.

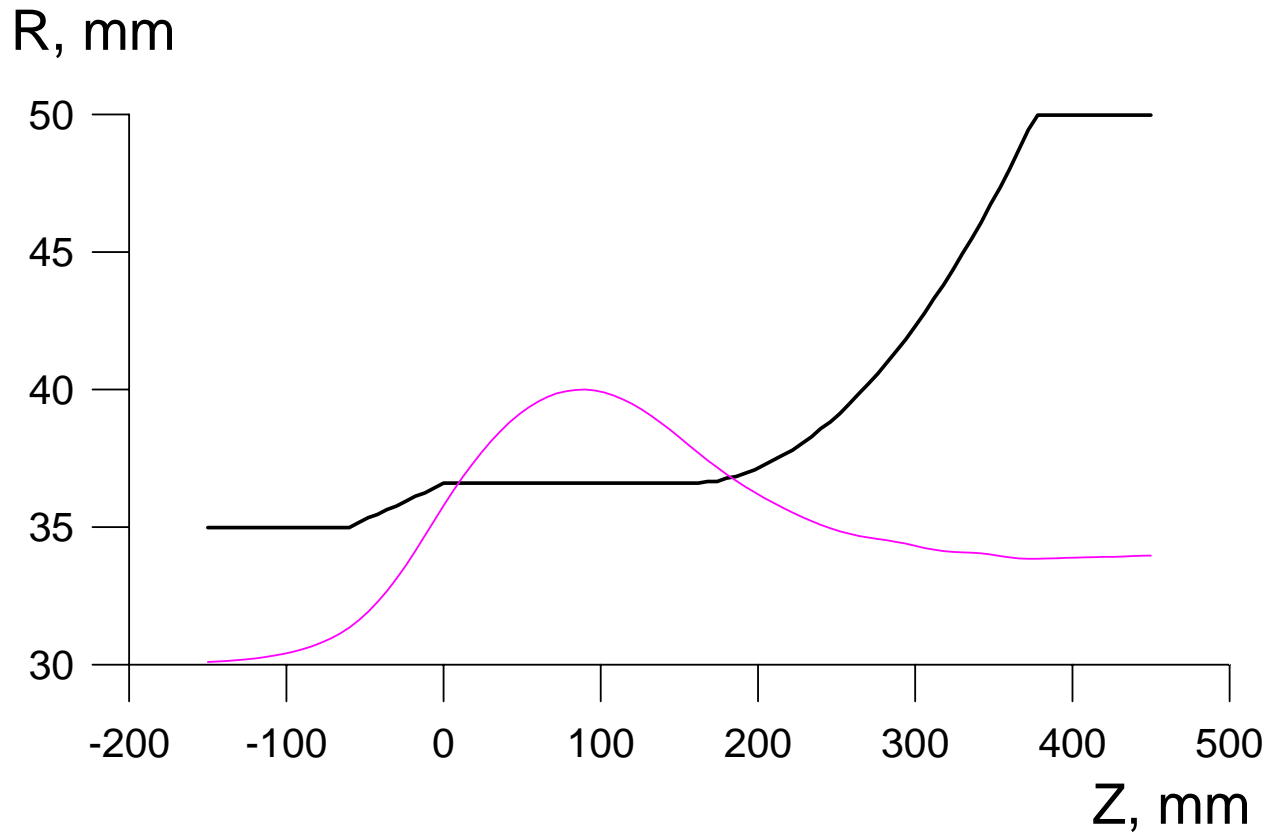


5GHz/500kW/1s Gyrotron

Calculated power and efficiency v.s beam current at various pitch-factors

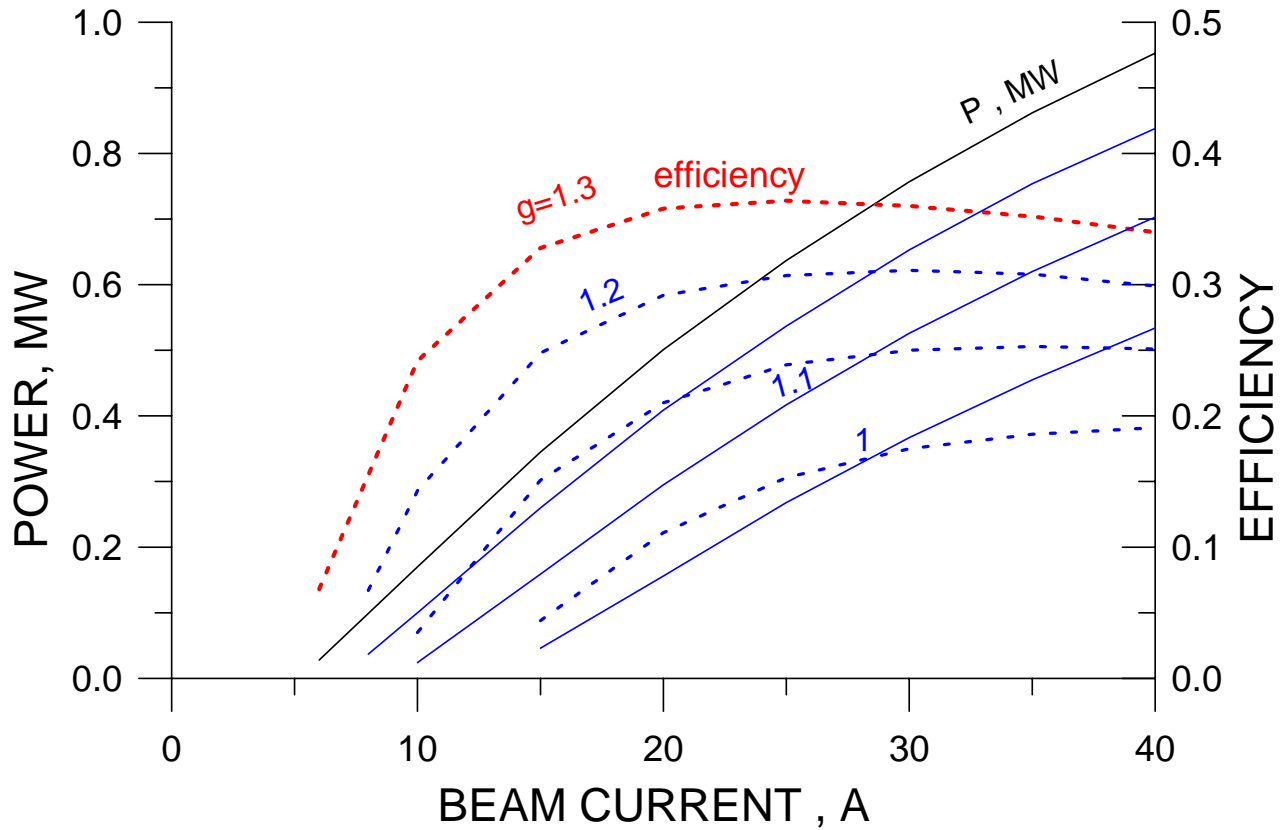

5GHz/500kW/1s Gyrotron


REPITER

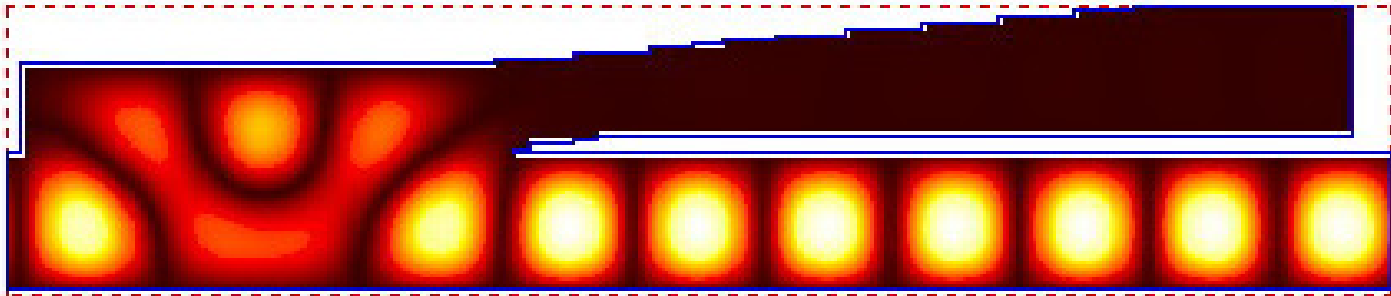

The repeater was carried out as the shielding slot of a circular waveguide. The conic collector was interfaced to the cylindrical screen of the repeater, and the electronic beam was deduced on a collector through a ring crack between the screen and a target waveguide. Such schema of division of an electromagnetic wave and electron beam has allowed reducing considerably length of gyrotron.

5GHz/500kW/1s Gyrotron

COLLECTOR

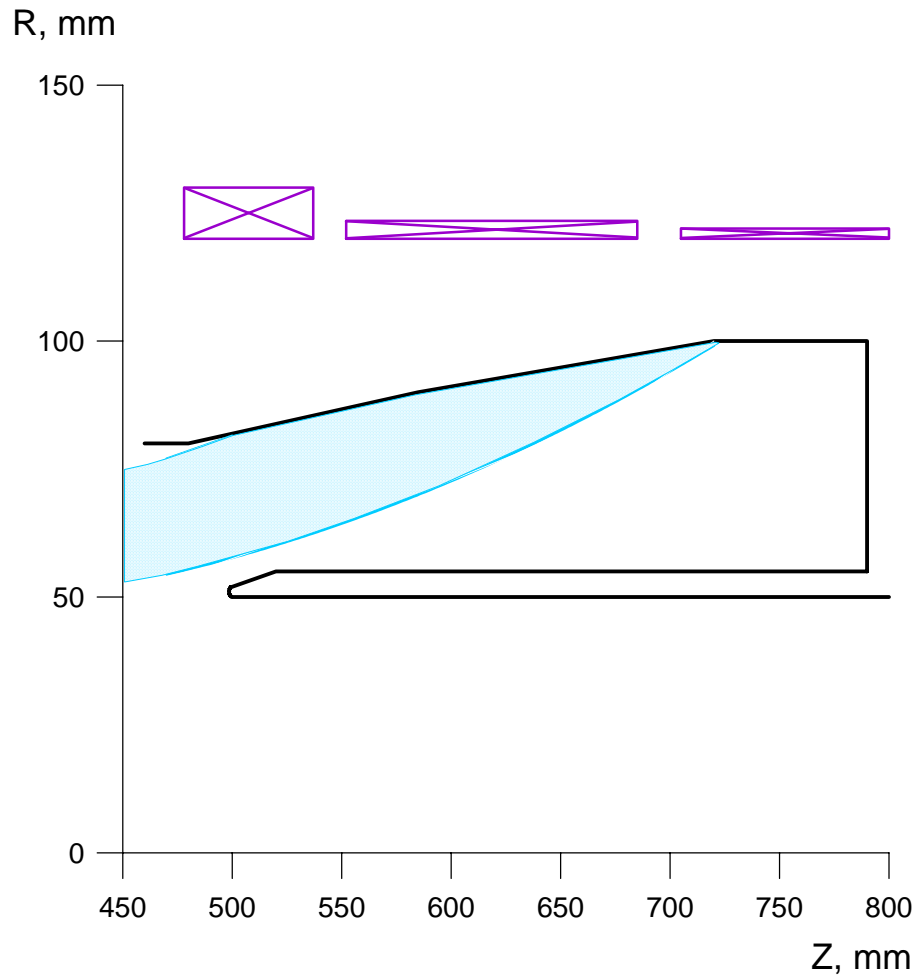

2.5MW / 1c

5GHz/500kW/1s Gyrotron

MAGNETIC SYSTEM (Criomagnet)

Height (max)	1150 mm
Diameter (max)	650 mm
Diameter of a “warm” aperture	205 mm
Length of a “warm” aperture	760 mm
Capacity helium tank	71 liter
Capacity nitric tank	50 liters
Working current	22 A


5GHz/500kW/1s Gyrotron

MAGNETIC SYSTEM (Solenoid)

External diameter	400 mm
Internal diameter	205 mm
Length	650 mm
Weight	300 kg
Power	5.5 kW
Working current	86 A


5GHz/500kW/1s Gyrotron

Calculated and measured power and efficiency v.s beam current

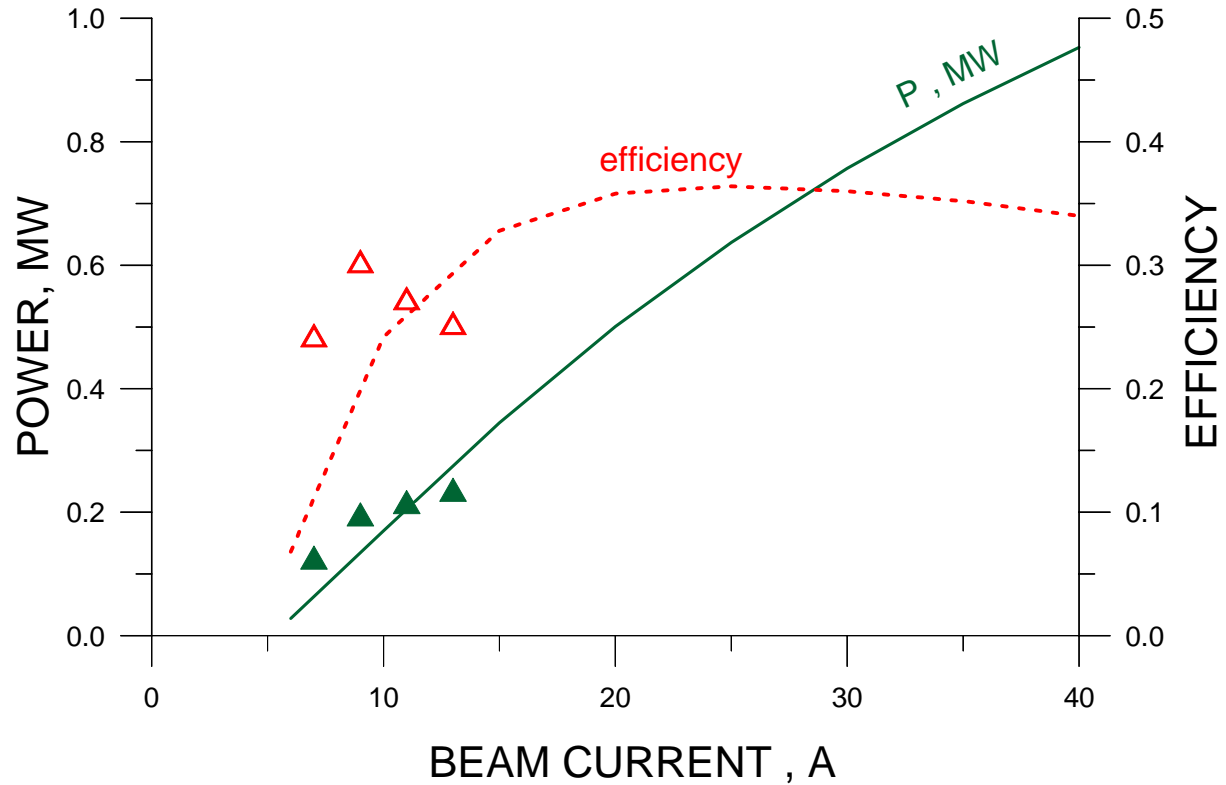

28GHz/500kW/0.1s Gyrotron

General view and main parameters

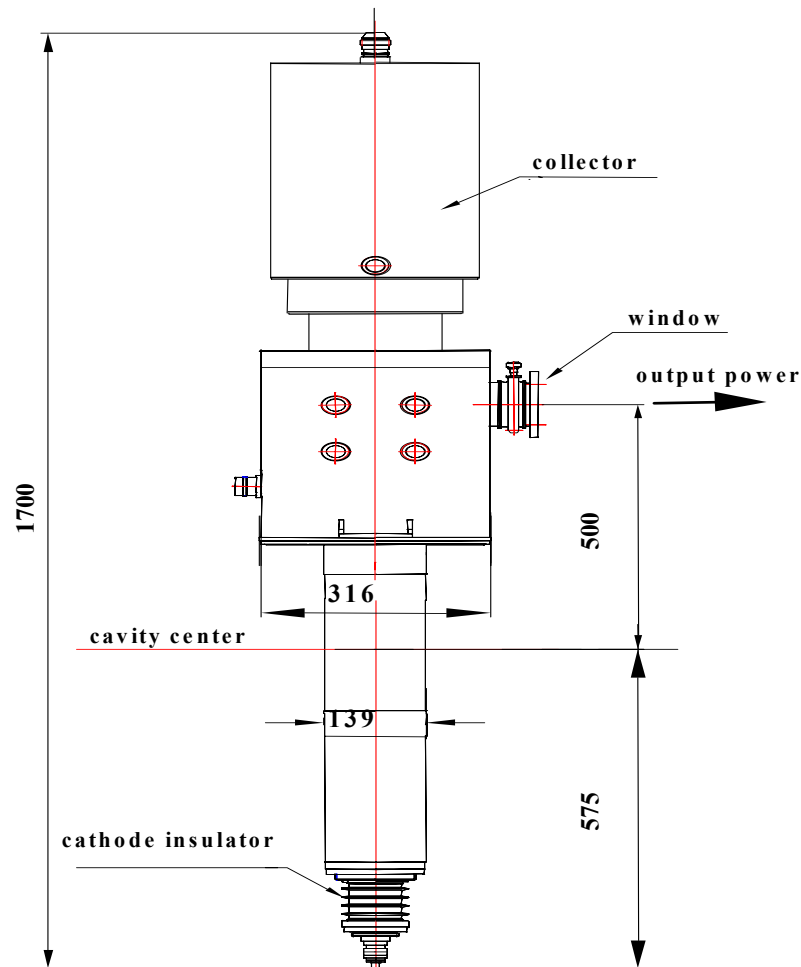


Operating mode	TE_{4,2}
Frequency	28 GHz
Electron energy	70 keV
Beam current	20 A
Pulse duration	0.1 s
Efficiency	36 %
Output power	500 kW

28GHz/500kW/0.1s Gyrotron
DIODE-TYPE MAGNETRON INJECTION GUN

Beam voltage	70 kV
Nominal beam current	20 A
Cathode radius	21.5 mm
Beam radius in cavity	7 mm
Density of emitter current	2.5 A/cm²
Pitch-factor	1.3

28GHz/500kW/0.1s Gyrotron
Measured Power and Efficiency v.s Beam Current

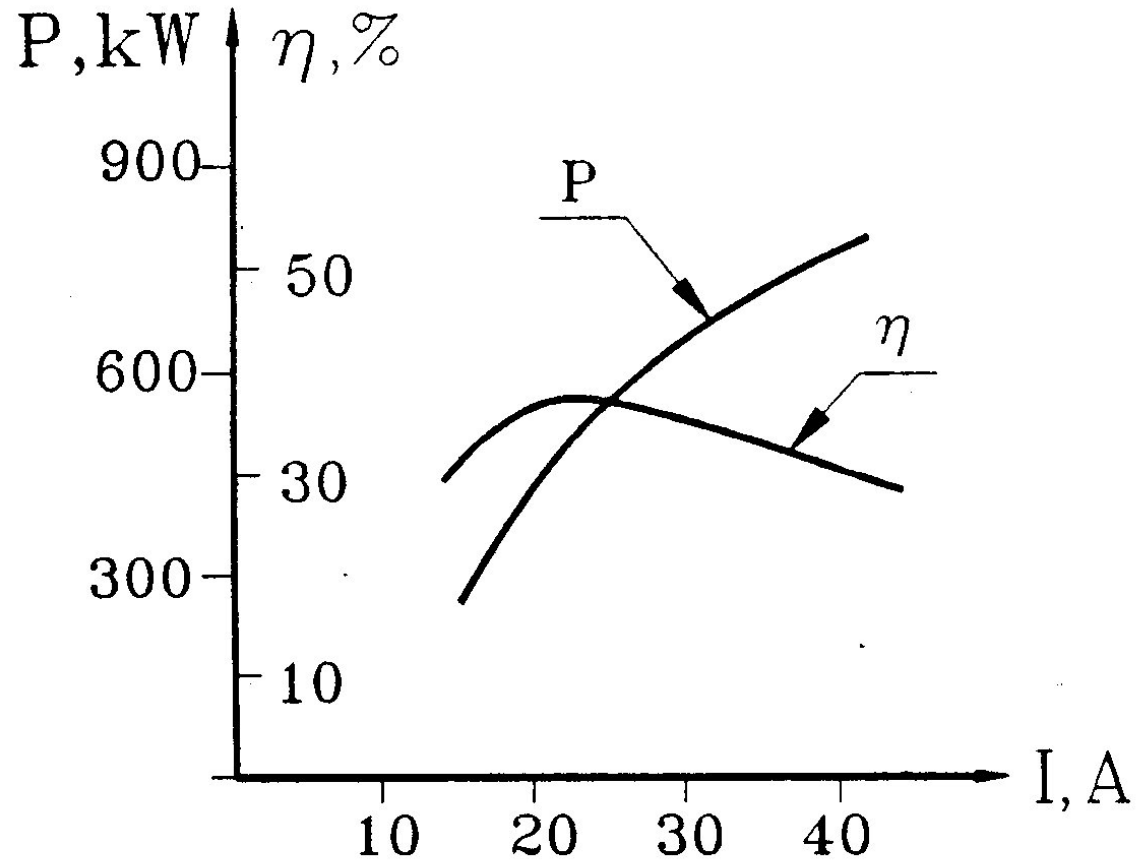


17.5GHz/1MW/5s Gyrotron Project

Design modes

mode	TE _{4,2,1}	TE _{5,2,1}	TE _{1,3}
ν	9.28	10.52	8.54
R _{cav} , mm	25.35	28.70	23.30
P _{ohm} , kW/cm ²	0.34	0.30	0.27


17.5GHz/1MW/5s Gyrotron Project

Mode Converter

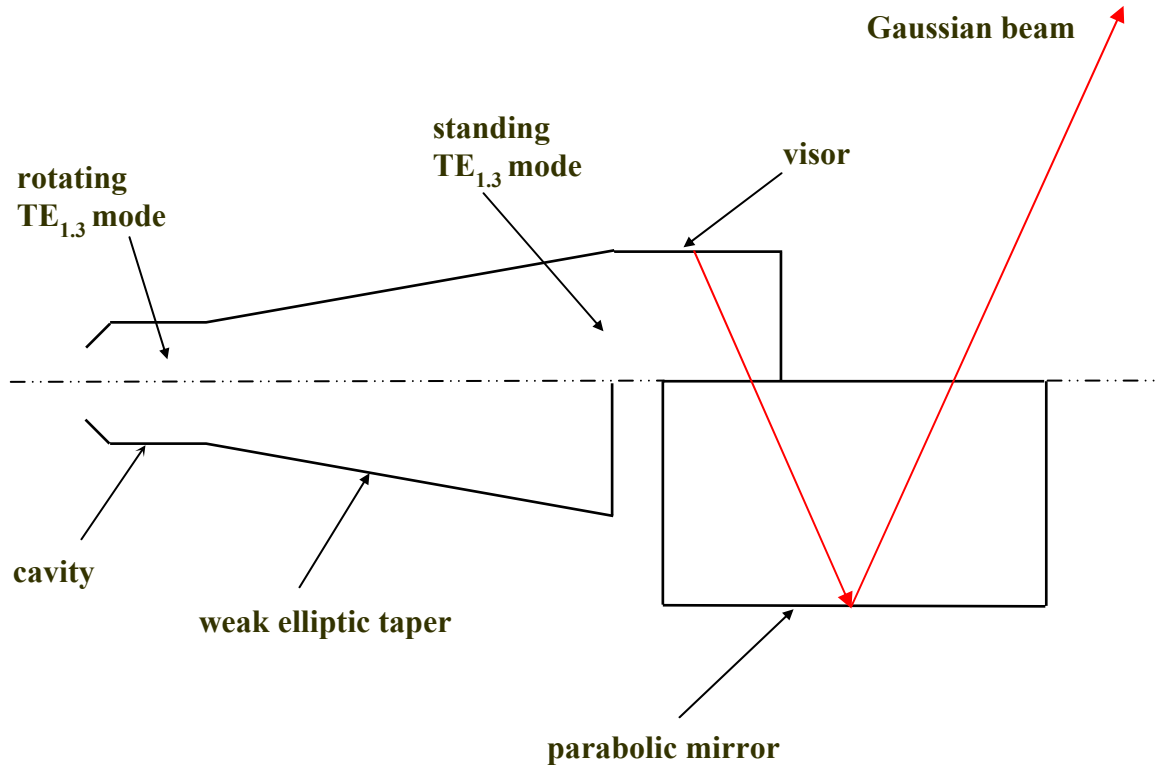


17.5GHz/1MW/5s Gyrotron Project

Gyrotron output parameters

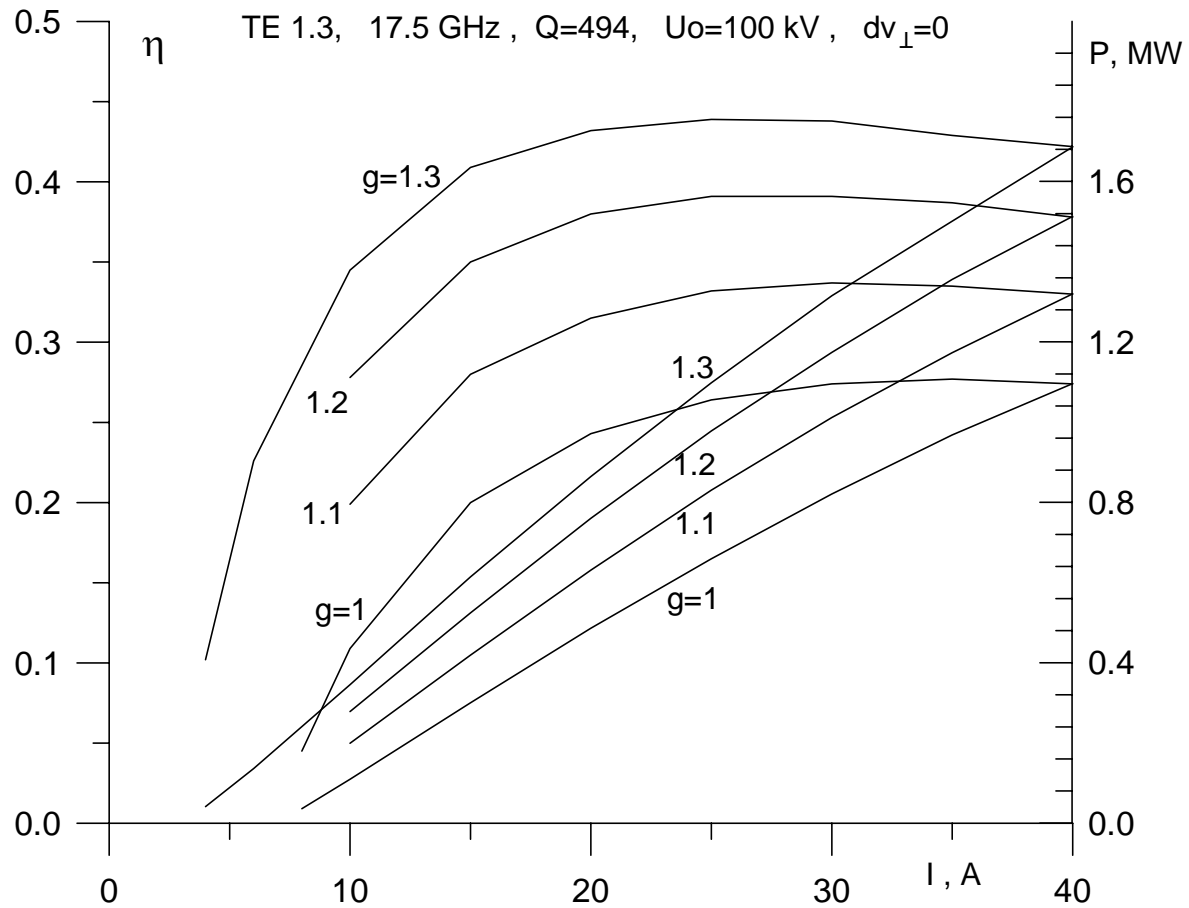



17.5GHz/1MW/5s Gyrotron Project

MAGNETRON INJECTION GUN

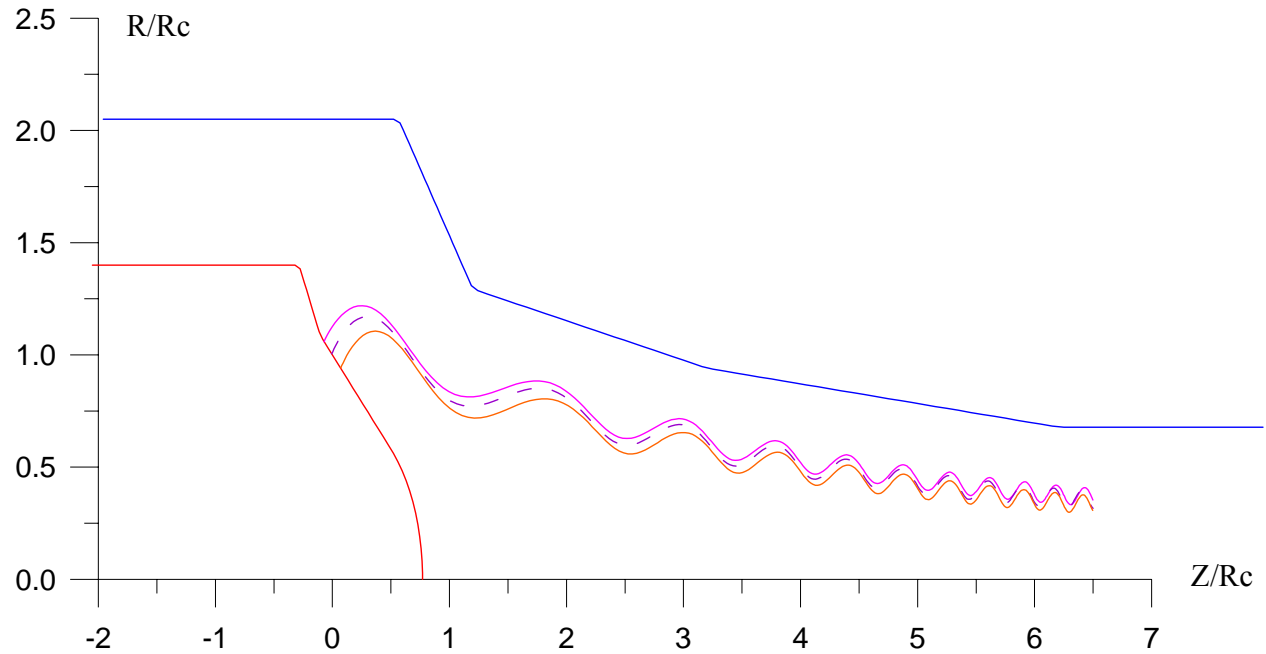


17.5GHz/1MW/5s Gyrotron Project

MAGNETRON INJECTION GUN

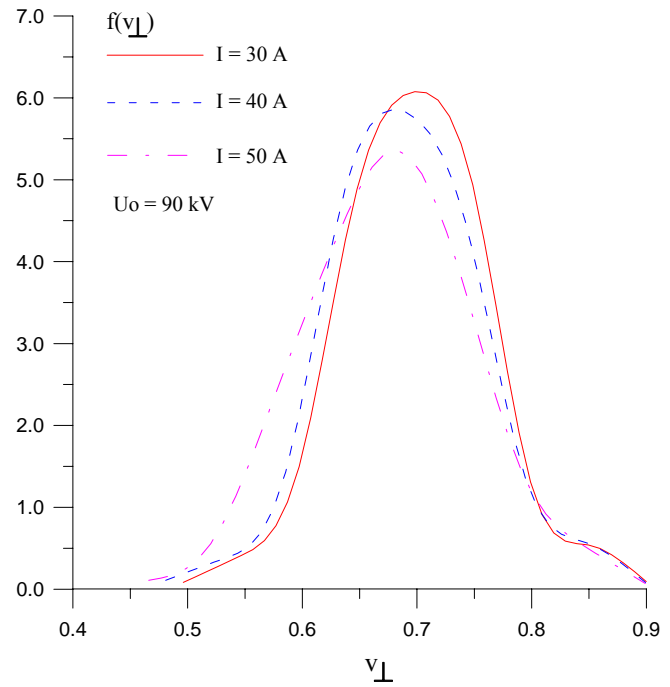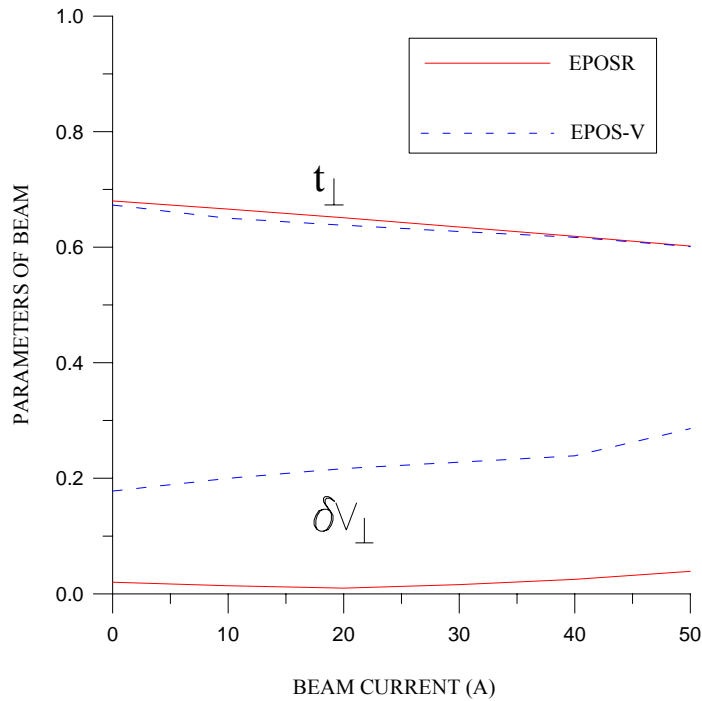


17.5GHz/1MW/5s Gyrotron Project

COLLECTOR SYSTEM

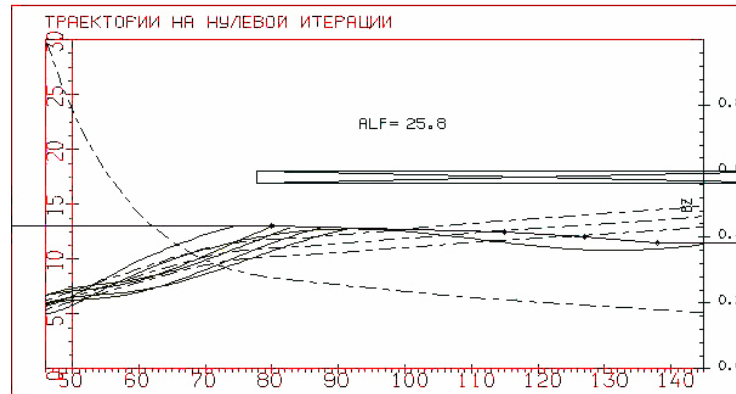


Trajectories without space charge in the system.

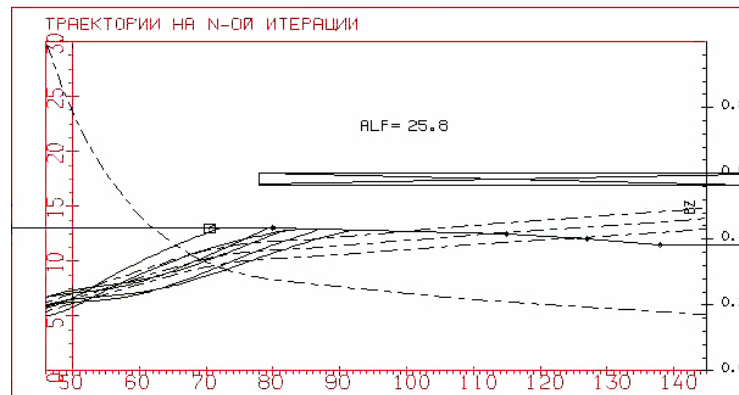


Trajectories with space charge in the system.

17.5GHz/1MW/5s Gyrotron Project

COLLECTOR SYSTEM

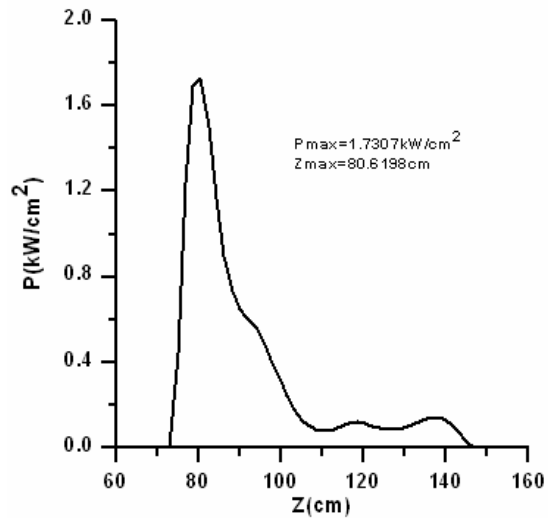

**Longitudinal heat load density
distribution without space charge calculation**

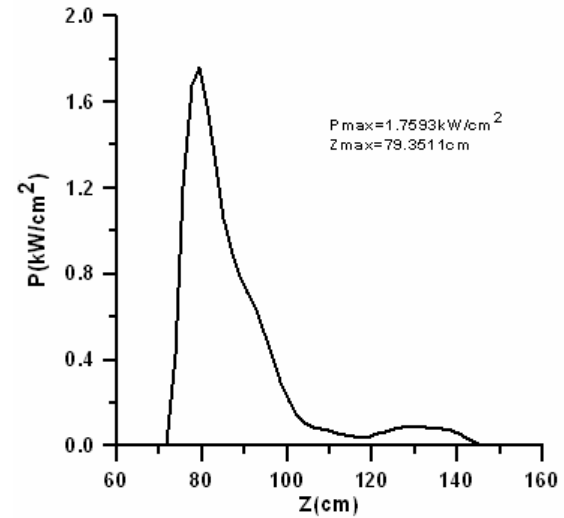


**Longitudinal heat load density
distribution with space charge calculation**


17.5GHz/1MW/5s Gyrotron Project

COLLECTOR SYSTEM

Collector with 150 mm radius

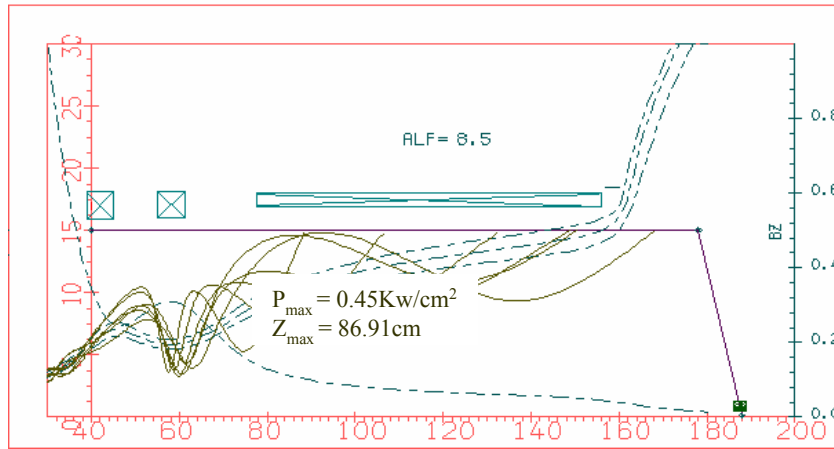

Electron trajectories in optimal version.

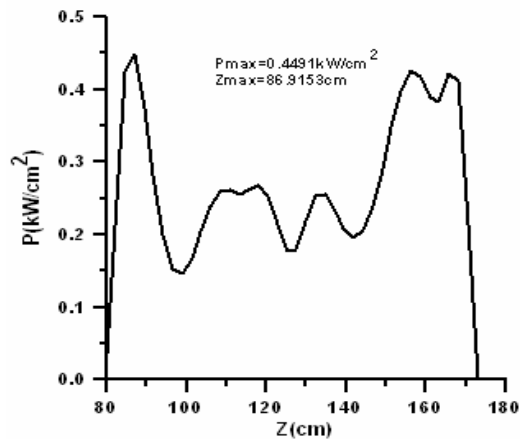

Heat lode distribution in optimal case.


28GHz/1MW/5s Gyrotron Project

Design modes

mode	TE_{5,2,1}	TE_{6,2,1}	TE_{7,2,1}
ν	10.52	11.73	12.93
R_{cav}, mm	17.95	20.00	22.05
P_{ohm}, kW/cm²	0.44	0.40	0.36


28GHz/1MW/5s Gyrotron Project

Gyrotron output parameters

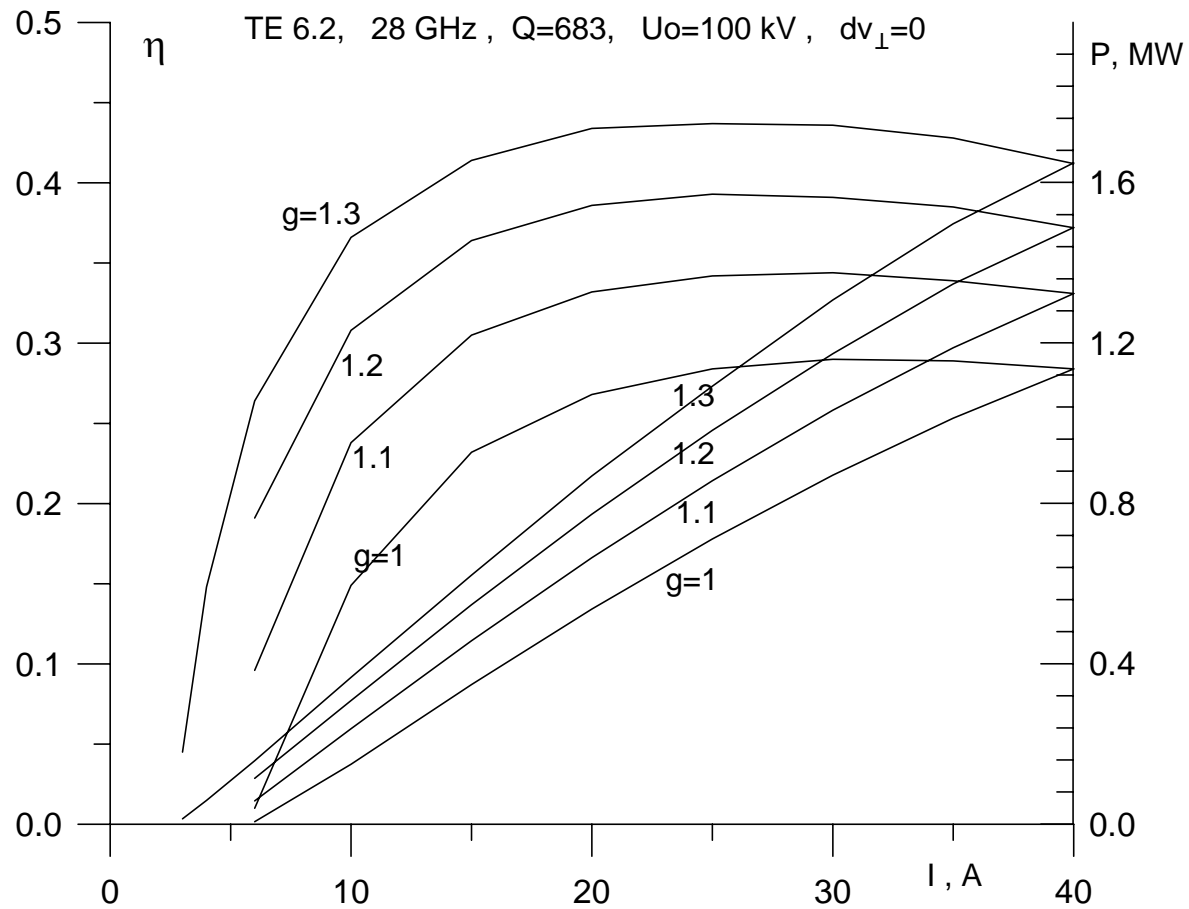



28GHz/1MW/5s Gyrotron Project

MAGNETRON INJECTION GUN

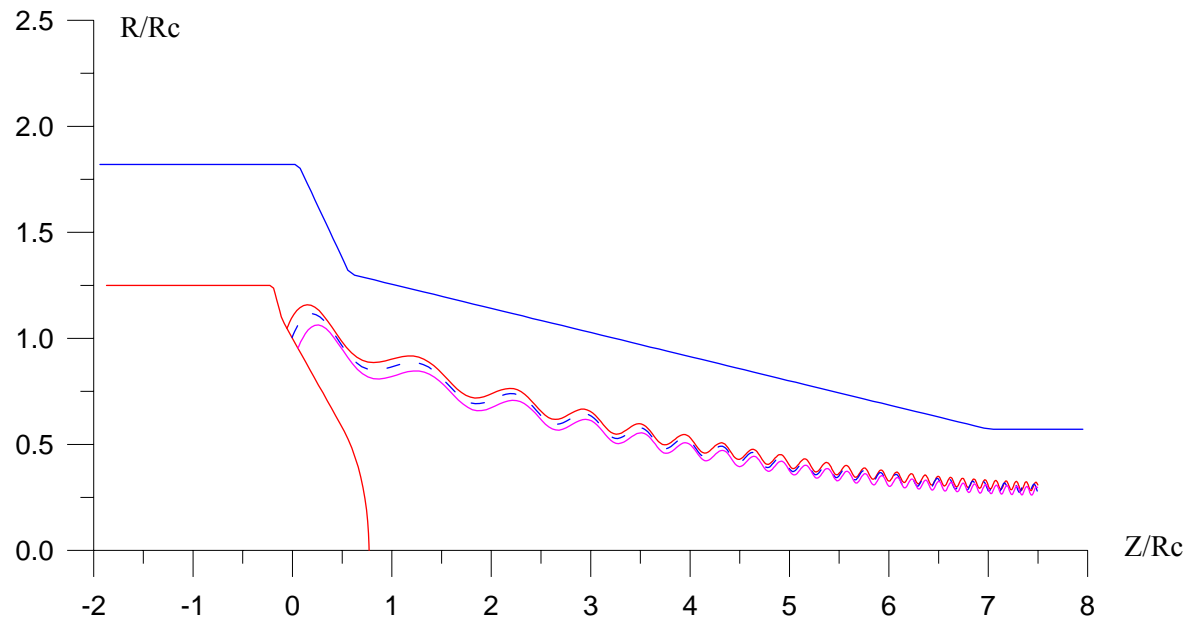


28GHz/1MW/5s Gyrotron Project

MAGNETRON INJECTION GUN

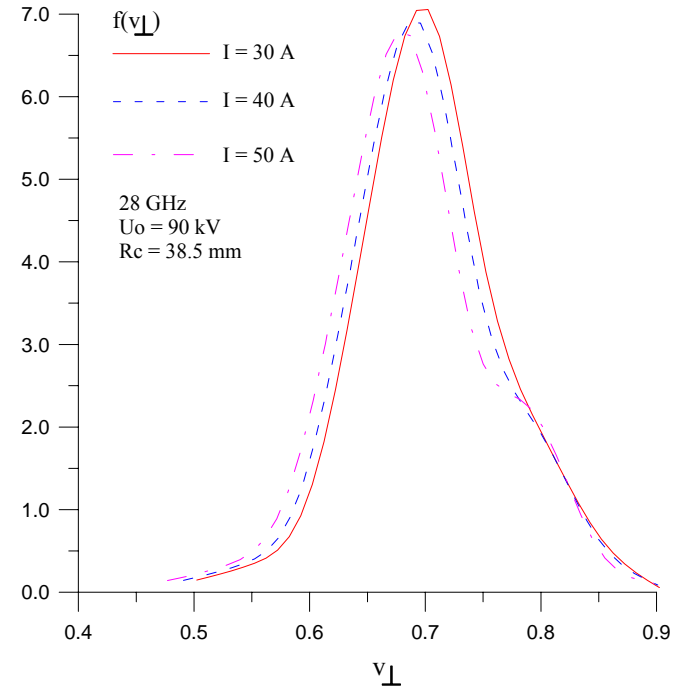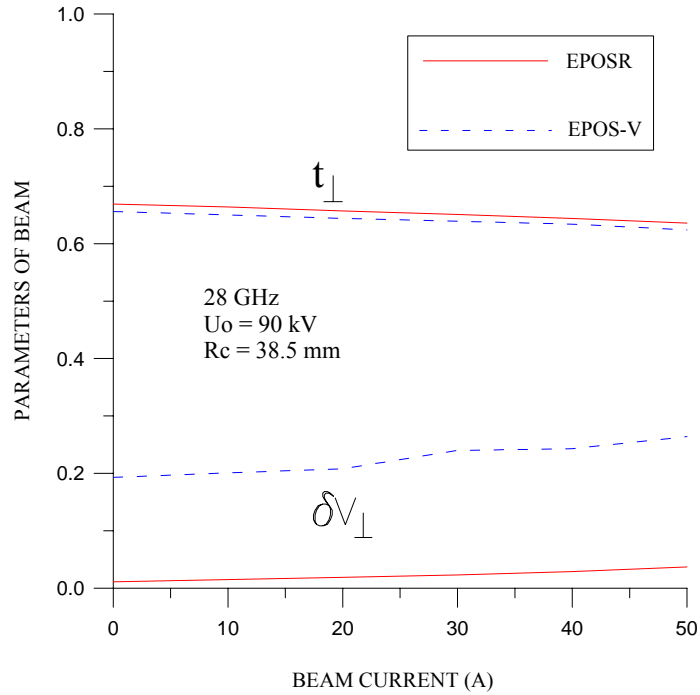

28GHz/1MW/5s Gyrotron Project

Gyrotron output parameters

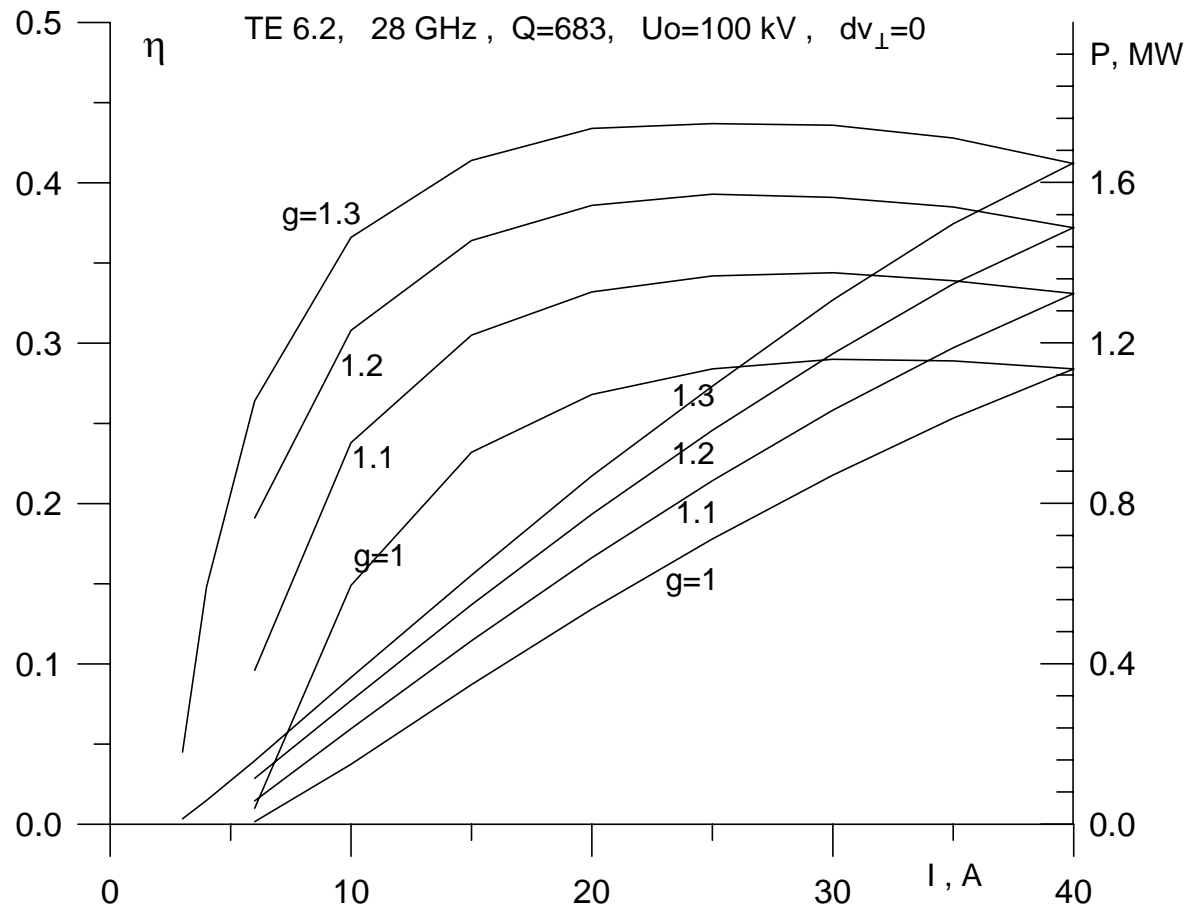

Conclusion

- **Low frequency powerful gyrotrons development in Russia is presented.**
- **The 0.5 MW/01s regime is shown at operating frequencies.**
- **Several design versions of 5 GHz, 17.5 GHz and 28 GHz gyrotrons with output power 0.5-1 MW, its specific property details are presented.**
- **Main and special technical problems of low-frequency gyrotron and test set-up are outlined and discussed.**
- **The long pulse and CW versions of low-frequency gyrotron are under construction now.**